



Areas of Application

Isolates pneumatic energy without the expense and inconvenience of installing in-line lockout valves. Device is applied to the male fitting, isolating equipment from all compressed air sources. Hole in center of device allows for permanent storage on an air hose and a loop on the side can be used to hang the hose and lockout device.

Details

- Fiber-glass reinforced Nylon: long-lasting, robust and non-conductive
- 3 different connections for most common compressed air couplings with up to 19/32" / 15 mm outside diameter
- The hole in the middle can be used to attach and store the lockout device directly at the connection
- Holds 1 padlock with 1/4" / 5 mm and 1 padlock with 9/32" / 6.5 mm shackle diameter


Material

- Body: Fiber-glass reinforced Nylon

Dimensions

Item	Width:	Length:	Depth:
P603	72.0 mm	72.0 mm	21.0 mm

Diameters of types: $\varnothing C = 10.58 \text{ mm}$, $\varnothing D = 8.45 \text{ mm}$, $\varnothing E = 11.80 \text{ mm}$

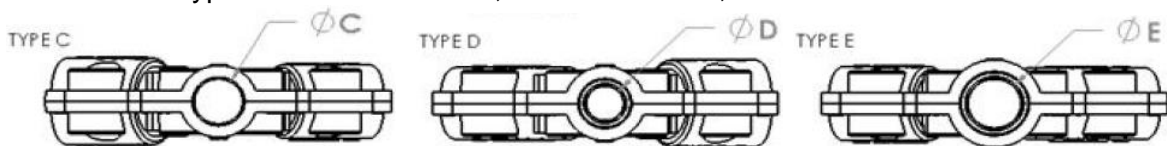

Temperature Range

- Glass-filled Nylon: -20° to 120°C (0° to 250°F)

Chemical Resistance

All approved chemicals listed are based on the manufacturer's specified chemical resistance chart for plastic material only. The results were determined at a room temperature of +20°C/+68°F. All data are subject to environmental variables and product features.

Chemical	Grade
Mineral lubricants	Resistant
Aliphatic hydrocarbons	Resistant
Aromatic hydrocarbons	Resistant
Gasoline	Conditionally resistant
Weak mineral acids	Conditionally resistant
Strong mineral acids	Not resistant
Weak organic acids	Conditionally resistant
Strong organic acids	Not resistant
Oxidizing acids	Conditionally resistant
Weak bases	Resistant
Strong bases	Conditionally resistant
Trichloroethylene	Conditionally resistant
Perchloroethylene	Not resistant
Acetone	Conditionally resistant
Alcohols	Resistant
Hot water (hydrolysis resistance)	Conditionally resistant
UV light and weather	Conditionally resistant

Legal Note

ABUS products are sold with the understanding that the buyers will test them in actual use and determine for themselves their adaptability to their intended uses.